


# **PRODUCT SPECIFICATION**

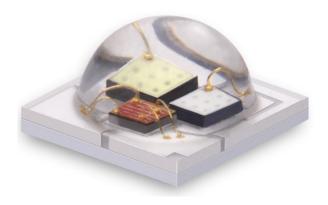

# Part No.: JH-3535RGB12S26-T9A High Power LED

# Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	Р3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Tape&Reel Packing	P6
9.Soldering Advice	P7
10.Cautions	P8




### 1.Product Features


- High Power RGB LED
- Dome Lens Package
- Viewing Angle 120 Degree
- **Transparent Silicone**

- Chip Material: InGaN AlGaInP
- **RoHS Compliant**


### 2.Dimensions




Top view




Side view



**Bottom view** 



Perspective view

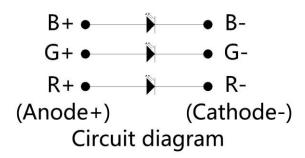

#### **Notes:**

- 1. All dimensions are in millimeters.
- 2. Tolerance is ±0.1mm unless otherwise noted.



## **3.**Absolute Maximum Rating @ Ta=25 $^{\circ}$ C

Parameter	Symbol	Maximum Rating	Unit	
Continuous Forward Current	IF	350	mA	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	500	mA	
Reverse Voltage	VR	5	V	
Power Dissipation	PD	1000	mW	
Electrostatic Discharge	ESD	1000	V	
Operating Temperature Range	TOPR	-25°C to +60°C		
Storage Temperature Range	TSTG	-35°C to +80°C		
Lead Soldering Temperature	TSOL	260°C		

## **4.Optical Character** @ Ta=25 $^{\circ}$ C

Parameter	Symbol	Color	Min.	Тур.	Max.	Unit	Test Condition
Forward Voltage	VF	R	2.0	2.2	2.4	V	I <sub>F</sub> =350mA
		G	3.0	3.2	3.4	V	I <sub>F</sub> =350mA
		В	3.0	3.2	3.4	V	I <sub>F</sub> =350mA
		R	40	45	50	Lm	I <sub>F</sub> =350mA
Luminous Flux	Ф	G	60	75	90	Lm	I <sub>F</sub> =350mA
		В	15	20	25	Lm	I <sub>F</sub> =350mA
		R	620	623	625	nm	I <sub>F</sub> =350mA
Dominant Wavelength Wld	Wld	G	520	522	525	nm	I <sub>F</sub> =350mA
	В	460	462	465	nm	I <sub>F</sub> =350mA	
Reverse Current	IR				10	μΑ	V <sub>R</sub> =5V
Viewing Angle	201/2				120	deg	I <sub>F</sub> =350mA
Recommend Forward Current	IF(rec)	RGB			350	mA	


#### **Notes:**


Measurement tolerance of forward voltage  $\pm 0.1 V$ 





### **5.** Optical Character Curves

( 25°C Ambient Temperature Unless Otherwise Noted )

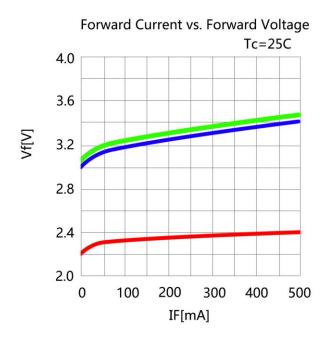

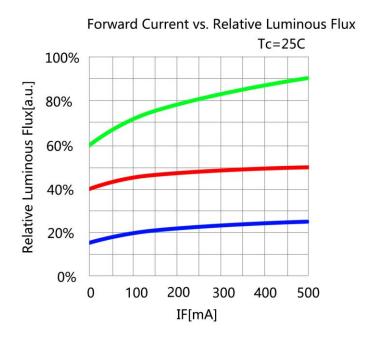


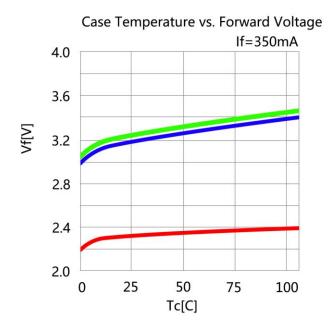

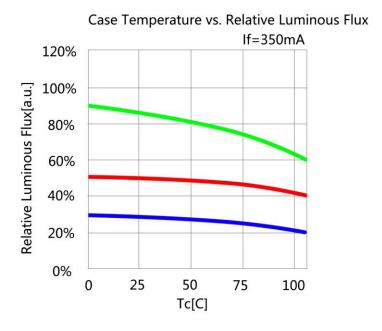




## **6. Spectrum Curves**

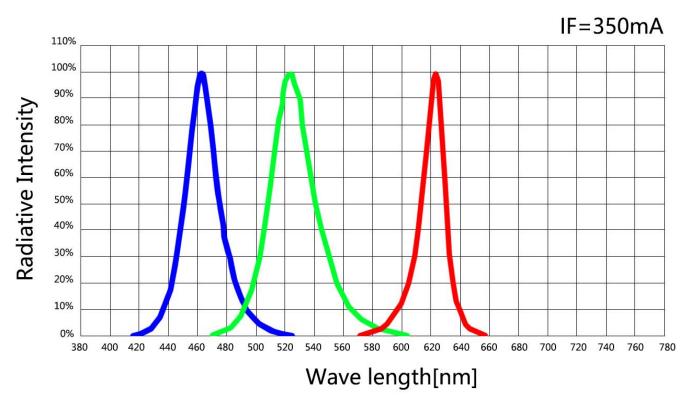

### **7.** Viewing Angle Curves

### **Radiation Characteristic**


IF=350mA

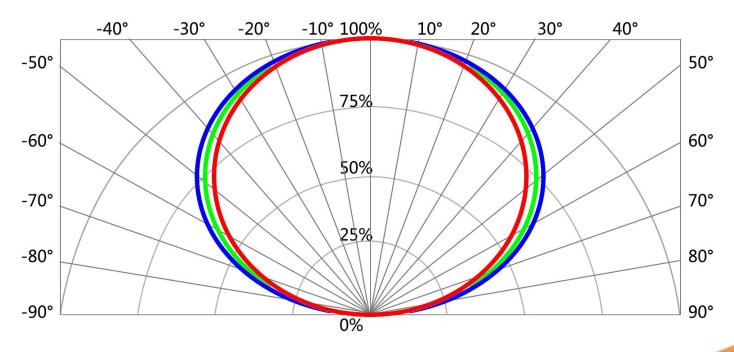



### 8.Tape&Reel Packing

1. Recommend unpacked LED beads be welded within one day, if not, please vacuumize again and store in an environment of 20-35°C and 30-60% humidity. If can't vacuumize, please store LED beads in moisture proof box, control at  $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$ , humidity 50-60%. If unpacked above 1 week, bake at  $60\pm5^{\circ}\text{C}$  for 10-12 hours before weld.

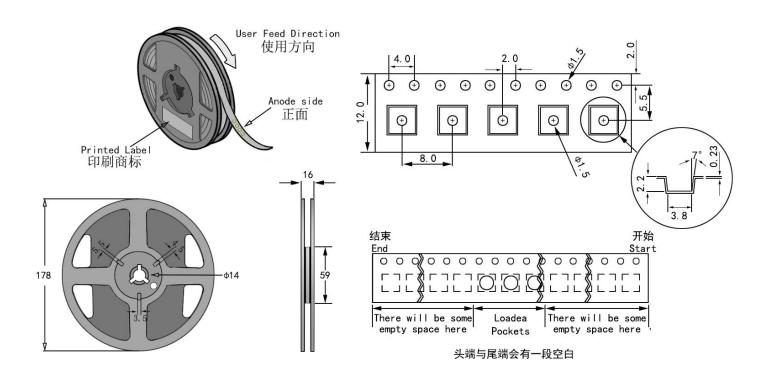

#### **Notes:**

1. QTY: 1000pcs/Reel


2. Tolerance ±0.2mm.

3. Package: P/N



### **9.**Soldering Advice

1. When soldering, don't touch the LED appearance gel during, this bad operation will destroy the LED. Molding LED usually use reflow soldering, please refer to the following reflow temperature curve, and recommend the user follow the soldering temperature curve of the solder paste.

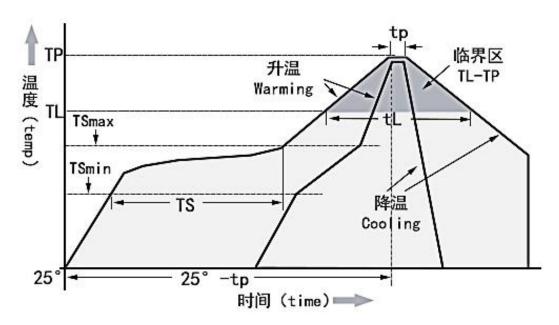

Temperature Curve Character	Lead-free solder			
Average heating rate(TSmin to Tp)	最高 3℃/秒 Top 3 ℃ / s			
	10p 5 C / S			
Preheating: Minimum temperature (TSmin)	90℃			
Preheating: Maximum temperature (TSmax)	200℃			
Preheating: Time (TSmin to TSmax)	60-180 s			
Duration above temperature: Temperature TL	240°C			
Duration above temperature: Time tL	60-150 s			
Peak/classification temperature (Tp)	260℃			
Time within 5°C of actual peak temperature (tp)	20-40 s			
	最高 6℃/秒			
Cooling speed	The highest 6 ℃ / s			
	最多8分钟			
Time to reach peak temperature at 25℃	8 minutes Max			



#### 10.Cautions


#### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



#### 2. Heat Dissipation

- A. It is recommended to configure reasonable heat dissipation device for the product.
- B. The best working temperature range of the product is 40-60°C. It is recommended to control the working temperature of the product within a reasonable range.

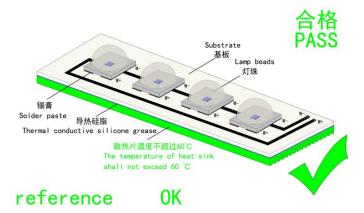

#### 3. Installation Conditions

A. Do not exert any pressure on the LED area during the use of the led beads. If the machine is used to take materials, select a suction nozzle of reasonable size, such as below:

